

LGES-5048

LGES-5048 Hybrid Inverter Specification



LGES-5048
Battery Input Data

| | |
|--|--|
| Battery Type | Li-Ion RESU6.5, RESU10, RESU12, RESU13 |
| Nominal Battery Voltage | 48 V |
| Max. Charging Voltage | ≤ 60 V (Configurable) |
| Max. Charging Current ¹⁾ | 100 A |
| Max. Discharging Current ¹⁾ | 100 A |
| Battery Capacity | 126~504 Ah |
| Charging Strategy for Li-Ion Battery | Self-adaptation to BMS |

PV String Input Data

| | |
|--|-----------|
| Max. DC Input Power - without battery | 6500 W |
| Max. DC Input Power — with battery | 7500 W |
| Max. DC Input Voltage | 580 V |
| Max. DC Input Voltage for battery charging | 500 V |
| MPPT Voltage Range | 120~550 V |
| Start-up Voltage ²⁾ | 125 V |
| Min Feed-in Voltage ³⁾ | 150 V |
| MPPT Voltage Range for Full Load | 215~500 V |
| Nominal DC Input Voltage | 360 V |
| Max. Input Current | 11 A |
| Max. Short Current | 13.8 A |
| PV Over-current Protection | 21 A |
| PV Back-feed Current | 0 A |
| No. of MPP Trackers | 2 |
| No. of Strings per MPP Tracker | 1 |
| DC Overvoltage Category | II |

Efficiency

| | |
|---------------------------------|--------|
| Max. Efficiency | 97.6 % |
| Max. Battery to Load Efficiency | 94.0 % |
| European Efficiency | 97.0 % |
| MPPT Efficiency | 99.9% |

AC Output Data (Back-up)

| | |
|--|---------------|
| Max. Output Apparent Power | 4600 VA |
| Peak Output Apparent Power ⁴⁾ | 6900 VA, 3sec |
| Max. Output Current | 20 A |
| Nominal Output Voltage | 230 V (±2%) |
| Nominal Output Frequency | 60 Hz (±0.2%) |
| Back-up Over Current Protection | 30 A |
| Output Inrush Current (Peak / Duration) | 55 A, 2 μs |
| Automatic Switch Time | 10 ms |
| Output THDv (@Linear Load) | <3% |

1) The actual charge and discharge current also depends on the battery.-

2) When there is no battery connected, inverter starts feeding in only if string voltage is higher than 200V.

3) If there is no battery connected, inverter starts feeding into grid only if PV voltage > 200V.

4) On condition of battery and PV power being enough.

LGES-5048
AC Output Data (On-grid)

| | |
|---|---|
| Nominal Power Output Grid | 5000 W |
| Max. Apparent Power Output to Utility Grid | 4950 VA |
| Max. Apparent Power from Utility Grid | 9200 VA |
| Nominal Output Voltage (V) | 230 single phase |
| Nominal Output Frequency (Hz) | 60 |
| Max. AC Output Current to Grid (A) | 21.7 |
| Max. AC Current from Grid (A) ⁵⁾ | 40 A |
| AC Back-feed Current | 0 A |
| Max. Output Fault Current (Peak / Duration) | 43 A 0.2s |
| Output Inrush Current (Peak / Duration) | 55 A 2 μs |
| Output Inrush Current (Peak / Duration) | 60 A 3 μs |
| Output Power Factor | ~(Adjustable from 0.8 leading to 0.8 lagging) |
| Output THDi (@Nominal Output) | <3% |
| AC Overvoltage Category | III |

General Data

| | |
|-------------------------------------|--------------------------|
| Operating Temperature Range | -25~60°C |
| Storage Temperature Range | -30~65°C |
| Relative Humidity | 0~95% |
| Moisture Location Category | 4K4H |
| External Environment Pollute Degree | Grade 1,2,3 |
| Environment Category | Outdoor & Indoor |
| Operating Altitude | ≤4000 m |
| Cooling | Natural Convection |
| Noise | <25 Db |
| User Interface | LED & APP |
| Communication with BMS | CAN |
| Communication with Meter | RS485 |
| Communication with Portal | W-Fi ⁶⁾ |
| Mounting | Wall Bracket |
| Protection Degree | IP65 |
| Standby Self-Consumption | 43 W |
| Topology | High Frequency Isolation |

Protection


| | |
|---|--------------------|
| Anti-Islanding Protection | Integrated |
| PV String Input Reverse Polarity Protection | Integrated |
| Insulation Resistor Detection | Integrated |
| Residual Current Monitoring Unit | Integrated |
| Output Over Current Protection | Integrated |
| Output Short Protection | Integrated |
| Output Over Voltage Protection | Integrated |
| PV String over-current | Installer-supplied |

6) Only compatible with 2.4Ghz network.

Features

LGES-5048 inverter is designed to fit perfectly with RESU6.5, RESU10, RESU12 and RESU13 and is part of a Home PV Storage system package of LG Energy Solution.

- One home battery package of LG Energy Solution
- Reliable 10 Years Warranty provided by LG Energy Solution
- PV oversizing to 7.5kW with STCs
- Single point of Technical Support through LG Energy Solution Service

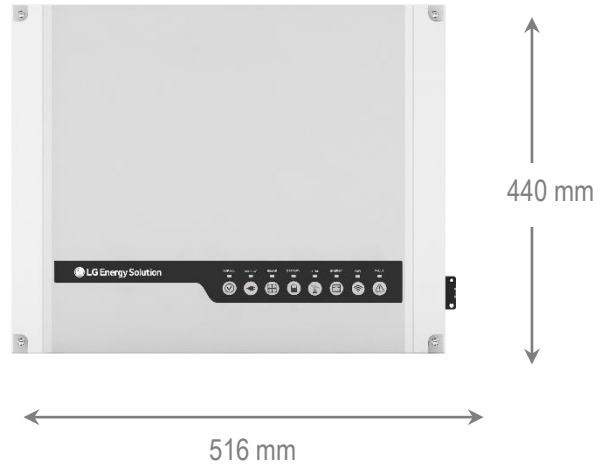

Mechanical Characteristics

| | | |
|------------|--------|--------|
| Dimensions | Width | 516 mm |
| | Height | 440 mm |
| | Depth | 184 mm |
| Weight | | 30 kg |



LG Energy Solution Australia Pty Ltd.
Unit 12, 35 Dunlop Rd, Mulgrave, VIC 3170
Phone 1300 178064
Sales: esssalesau@lgensol.com
Service: essserviceau@lgensol.com

LG Energy Solution Ltd.
Tower1, 108, Yeoui-daero, Yeongdeungpo-gu, Seoul, Republic of Korea. 07335
TEL : (82) 2-3773-1114 FAX : (82) 2-3773-7005
<http://www.lghomebattery.com/au> <http://www.lgensol.com>